


INSUL-MATE™
Deep Corrugated Sheeting

DESCRIPTION/SPECIFICATIONS

RPR Products manufactures deep corrugated sheeting forming a continuous pattern of ribs on 2.67" centers. 2.67" deep corrugated can be made in 7/8", 5/8" and 1/2" depths. Insul-Mate™ deep corrugated sheets are produced to a standard siding profile with a choice of either both longitudinal edges of the sheet formed down, or one longitudinal edge formed up and one formed down.


- Alloys:
- Aluminum 3003, 3105
 - Stainless Steel T304, T316
 - Galvanized
 - Galvalume Plus



- Thicknesses:
- Aluminum - .016" (.4mm), .020" (.5mm), .024" (.6mm), .032" (.8mm), .040" (1.0mm)
 - Stainless Steel - .010" (.25mm), .016" (.4mm), .020" (.5mm), .024" (.6mm), .032" (.8mm)
 - Galvanized - 30ga, 28ga, 26ga, 24ga, 22ga, 20ga, 18ga
 - Galvalume Plus - .016" (.4mm), .020" (.5mm), .024" (.6mm), .032" (.8mm)

Widths: See chart below

- Lengths: 3' to 32' Roll formed
 12" to 12' 3" Drum corrugated

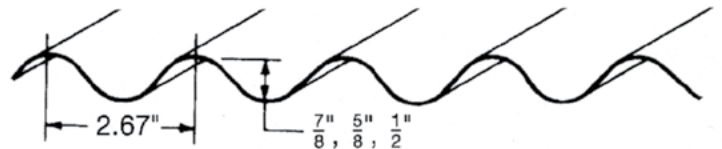

- Colors: Standard colors available (see color chart)
 Special colors upon request (minimums apply)

MOISTURE RETARDER

For added protection a moisture retarder can be applied to the inside of the metal. (See Moisture Re-

CORRUGATIONS	WIDTH FROM 36" WIDE MATERIAL	WIDTH FROM 48" WIDE MATERIAL
1/2"	33" (30" Coverage)	44" (41" Coverage)
5/8"	31 3/4" (28 3/4" Coverage)	42 1/2" (39 1/2" Coverage)
7/8"		40 1/2" (36 1/2" Coverage)